


Overview



- 1. Power LED/Beep LED
- 2. Multi-Track (3) Magnetic Stripe Reader (MSR)
- 3. 15" TFT Resistive Touch Screen (Liquid & dust resistant)

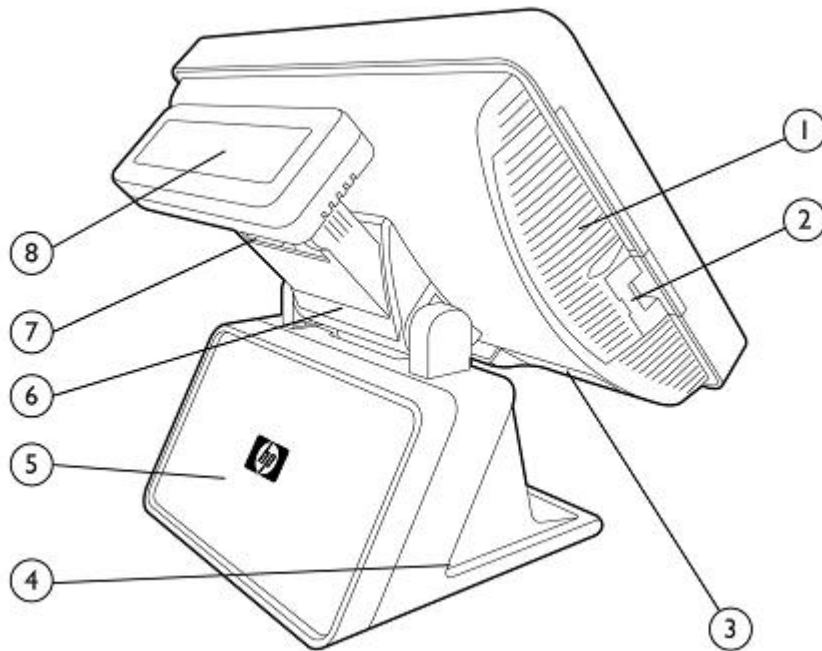

- 1. Two 2.5" Hard Disk Drive (HDD) bays
- 2. One USB 2.0 port, one audio line-out and one microphone-in jacks
- 3. I/O Panel with cover
- 4. Advertisement panel (non-electrical)
- 5. Main display hinge, allows for 90-degree pitch adjustment
- 6. Customer Facing Display hinge, allows for 80 degree pitch adjustment
- 7. Advertisement panel (non-electrical)
- 8. Main display hinge, allows for 90-degree pitch adjustment



Overview

4. Stand with internal power supply adapter
 8. Customer facing 2 Line (2 x 20) Vacuum Florescent Display (VFD). Optional 10.4" ap5000 LCD Customer Display also available.
-

At a Glance

- Intel® Core™ 2 Duo E7400 processor or Intel Celeron 440 processor
- One of the following operating systems:
 - Genuine Windows 7 Professional 32-bit
 - Windows Embedded POSReady 2009
 - FreeDOS
- Intel Q965/ICH8R Chipset
- Dual Channel DDR2 Memory
- 10/100/1000 NiC
- Powered ports (Serial and USB+POWER 24V)
- SMART III HDD or SSD
- RAID level 0,1 capable (not preconfigured from HP Factory)
- Manageability Tools
- 2 year production life cycle
- Cable Management Features
- Advertising Panel (for print ads)
- Energy Star 5, EU Compliant, RoHS2 Compliant
- HP Warranty, 3/3/3 standard

NOTE: All models and features may not be available in all countries.



Standard Features

Processors Intel® Celeron® 440 (2.0 GHz, 512K L2 Cache, 800 MHz FSB)
Intel Core™ 2 Duo E7400 (2.8 GHz, 3 MB L2 Cache, 1066 MHz FSB)

Operating System **Preinstalled**
Genuine Windows 7 Professional 32-bit*
FreeDOS
Genuine Windows Embedded POS Ready 2009
**This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.*

Graphics Integrated Intel Graphics Media Accelerator 3000

Display 15-inch diagonal TFT dual-bulb display, 1024 x 768 resolution, with 5-wire resistive type touchscreen. Precalibrated at factory but should be recalibrated after initial software via the calibration wizard. Hard or soft stylus input: finger tip, finger nail, or credit card edge to perform touch.

Touch Technology	5-wire resistive type
Resolution	1024 x 768
Max Color	16.7M
Contrast Ratio	800:1
Brightness	300 cd/m ²
Pixel Pitch	0.297mm
Viewing Angle	140° horizontally and 140° vertically
Response rate	2ms (rise time), 6ms (decay time)
Default Color Temperature	6488° K
Anti Glare Harness	3H
Color Gamut	61.56%
Backlight Units	2 CCFL

Memory **Dual-channel** DDR2 up to 4 GB capacity, 2 slots, supports 800 MHz; most configurations ship with 1 x 2GB or 1 x 1 GB + 1 x 2 GB (3 GB)

NIC Realtek RTL8111C Ethernet Connection, 10/100/1000, with WOL support

LAN STATUS:	10MB	100MB	1000MB
Activity is occurring (Left LED):	Amber blink	Amber blink	Amber blink
Link Status (right LED):	None	Green	Orange

Keyboard Keyboard not included. PS/2 or USB supported.
NOTE: A keyboard is required to unbundle the software image.



Standard Features

Pointing Device	Pointing Device not included. USB supported. Pointing devices include a mouse, trackball, touch pad, etc.
Multi Track (3) Magnetic stripe reader (MSR)	Integrated MSR, conforms to ANSI/ISO 7810, 7811 1/5, 7812, and 7813; Supports OPOS and JPOS drivers layer; 3 tracks: IATA, ABA, THRIFT; bi-directional swipe, LED indicates status of reader. NOTE: The MSR is standard on select models
Vacuum Fluorescent Display (VFD) (2 x 20 Customer Facing Display)	2 line x 20 character display (40 characters total), RS-232 interface, DC5V (COM 2 port set to 5 Volts at factory in BIOS setup). Supports complex character set, control commands, user-defined fonts and international fonts. Display pitch adjustment 80 degrees (10 degrees to 90 degrees), no height adjustment. WARNING: VFD (2 x 20 customer display) must be plugged into COM 1 or COM 2 (not COM3 since COM 3 does not support DC5V. Plugging the VFD into COM 3 may damage the VFD. COM 1 may be used for the VFD but 5 Volts will need to be selected in BIOS Setup for COM 1. NOTE: The VFD occupies COM 2 from the factory. Although three COM ports are present on ap5000, COM 2 is occupied by the VFD; therefore, only two COM ports are available to the end user when the VFD is installed.
Advertisement panel	This non-electrical panel features a clear cover. It may be removed so that print material/advertisements can be displayed. HP provides a template for the advertisement panel.
Storage	Hard Drive or Solid State Drive (2) 2.5" internal storage bays: 160 GB or 250GB 2.5" Hard Disk Drive (HDD) (select models), 64 GB or 80GB 2.5" Solid State Drive (SSD) (select models) NOTE: The ap5000 can be configured with a combination of the 160 GB, 250 GB HDD or 64 GB, 80 GB SSD; however, if RAID 1 is requested from the HP Factory, both storage bays must contain the same size drive. Optical Drive External USB only (not included). NOTE: an optical drive is required to restore the software image.




QuickSpecs

HP ap5000 All-in-One (AiO) Point of Sale (POS) System

Standard Features

I/O Panel	VGA	1	WARNING: This is a Powered VGA Port. Do not hot plug a monitor into the VGA port. Doing so may damage the monitor. Always power down the ap5000 when removing or attaching a monitor to the VGA port.
	USB 2.0	5: 4 (located at bottom of main display behind access panel), 1 left side (behind access panel)	
	Audio line out	1	
	Microphone in	1	
	Power connector	1: DC 19V for 130W AC power adapter	
	RJ-45/Ethernet	1	
	RS232 ports	3: Com 1 & 2 (5 V configurable in BIOS), Com 3 (12V configurable in BIOS)	NOTE: 1 COM port is occupied by the VFD so only 2 are available. If the optional 10.4" CFD is installed, then all 3 COM ports become available.
	USB+Power	1: 24 Volt	
	Keyboard (PS/2)	1	
	Parallel port	1	
	Kensington Lock Hole	1 (lock kit sold separately)	

I/O Panel Layout:

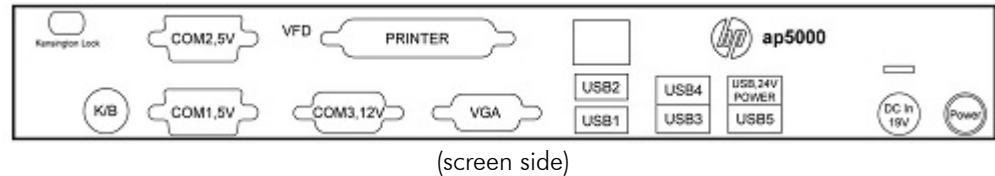

NOTE: I/O Panel located at rear, lower side of display under cover

Audio/Visual	Intel integrated high-definition audio with 2-channel Via VT1708S codec	
Software	Preinstalled software	PDF Complete, HP Client Automation Agent McAfee Total Protection (Windows 7 and Windows XP only)
Power Manager	Advanced Configuration and Power Management Interface (ACPI) allows the system to wake from a low power mode. NOTE: Power button is located on I/O panel and concealed under the I/O cover.	
SMBIOS	System Management BIOS, previously known as DMI BIOS, for system management information	
Security	Kensington Lock Support, (located in two places: underneath the base and on I/O panel), Power-On password protection, Setup password protection, USB port disable.	



Standard Features

Power Supply 130 W AC power adapter, ENERGY STAR 5.0 qualified, European Union 2005/32/EC (EUP LOT 6, EUP LOT 7), input 90 to 260 VAC; Frequency range 47 to 63 Hz


Service and Support Standard 3/3/3 limited warranty: 3 years parts, 3 years labor, 3 years on-site service. OS support for 90 days; quick restore solution included (requires external optical drive/not included)



Options

Customer Facing Display HP 10.4" ap5000 LCD Customer Display (CFD)

AZ191AA

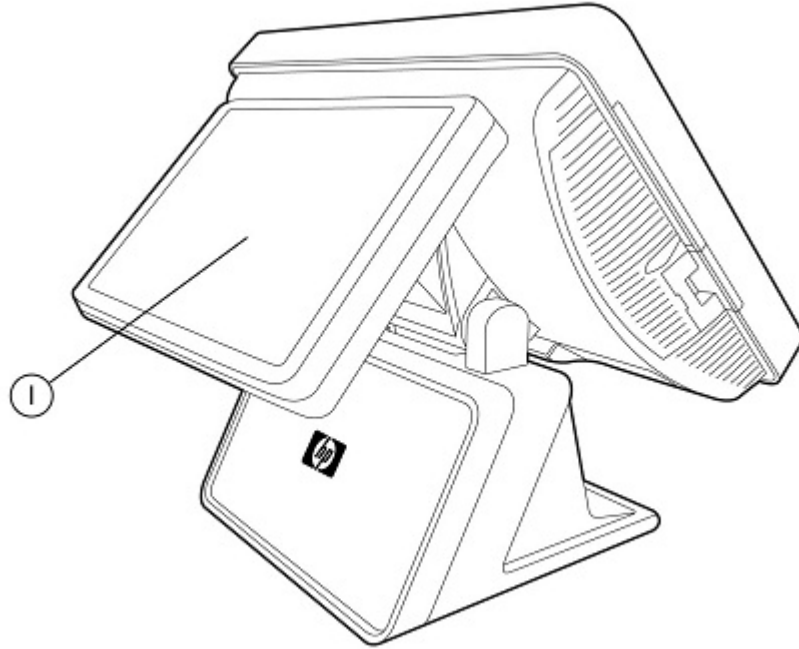

1. HP 10.4" ap5000 LCD Customer Display is shown attached to the back of the HP ap5000 All-in-One (AiO) Point of Sale (POS) System

Description

The HP 10.4" ap5000 LCD Customer Display is a liquid crystal display (LCD) that can be used to display transactional information (pricing, product description, receipt totals, etc.) and customer-facing marketing (promotional messages and images). The customer facing display (CFD) is mounted to the HP ap5000 All-in-One POS System in lieu of the 2-line Vacuum Florescent Display (VFD) (or 2 x 20 Customer Display). The CFD will display full color graphics and video via the on-board VGA port. The display receives power from the VGA port so there is no need for a separate power adapter "brick". User buttons are located on the back of the CFD, recessed and out of sight to the customer. The CFD uses the VFD mounting mechanism. Simple procedures for removing the VFD and installing the CFD are included in the 10.4" Customer Display documentation in the AZ191AA box contents. The CFD does not feature a touch screen.

How the display is powered: The 10.4" ap5000 LCD Customer Display does not require a separate power supply adapter. It is powered directly from the HP ap5000's VGA port (VGA+Power). When the display is first installed, 19 Volts is delivered to the VGA port, pins 4 and 11. At POST (Power-On Self-Test), the ID of the display is read via the SMBUS. If the product ID is recognized as the HP ap5000 10.4" LCD Customer Display, then 19 Volts remains on. If the product ID is recognized as something else, then 19 Volts is turned off.

WARNING: This is a Powered VGA Port. Do not hot plug a monitor into the VGA port. Doing so may damage the monitor. Always power down the ap5000 when removing or attaching a monitor to the VGA port.

10.4" LCD Customer Display Technical Specifications

- VGA+PWR architecture: Power on pins 4 and 11
- Display Area: 10.4" diagonal, 211.21mm (W) x 158.4mm (H)



Options

- Resolution: 1024 x 768
- Max Color: 0.26M
- Contrast Ratio: 500:1
- Brightness: 300 cd/m²
- Pixel Pitch: 0.20625mm
- Viewing Angle: 140° horizontally and 120° vertically
- Response rate: 25ms
- Default Color Temperature: 6487.8° K
- Anti Glare Harness: 3H
- Color Gamut: 50%
- Backlight Unit: CCFL

CFD (Customer Facing Display) User buttons

ON/OFF: Powers CFD on or off.

DOWN/LEFT: Move DOWN or move LEFT inside a menu.

UP/RIGHT: Move UP or move RIGHT inside a menu.

MENU/EXIT: ENTER into a menu or sub menu screen or EXIT from a menu or submenu screen.

RESET/EXIT: Push to automatically calibrate the CFD. Push again to EXIT.

Hard Drives	HP 160-GB 7200 SATA 3.0-Gb/s 2.5 inch Hard Drive (NOTE: Available June 14, 2010)	BS582AA
	HP 250GB 7.2K SATA 3.0-Gb/s 2.5" Hard Disk Drive	BZ724AA
	HP ap5000 64GB SATA Solid State Driv	BT391AA
	HP 64 GB Solid State Drive	VG679AA*
	HP 80 GB Solid State Drive for HP Business Desktop PCs	BM848AV**

NOTE: Drive caddy included with HP ap5000 base system
*Alternative if BT391AA is not available for 64GB.

Optical Drives	External USB CD/DVD R/RW Drive	FS943AA#ABA
-----------------------	--------------------------------	-------------

Input/Output Devices	HP USB 2-Button Optical Scroll Mouse	DC172AT
	HP USB Washable Keyboard	VF097AA

POS Peripherals	HP Cash Drawer	FK182AA
	HP USB Bar Code Scanner	EY022AA
	HP PoweredUSB Single Station Thermal Receipt Printer	FK224AA
	HP Dual Serial/USB Single Station Thermal Receipt Printer	BM476AA
	HP PoweredUSB Hybrid Printer with MICR	FK184AA
	HP Customer Pole Display	FK225AA



Options

Memory (DIMMs)	HP 1 GB PC2-6400 (DDR2 800 MHz)	BZ722AA*
	HP 2 GB PC2-6400 (DDR2 800 MHz)	BZ723AA**
	* Desktop PC memory AH058AA also compatible	
	** Desktop PC memory AH060AA also compatible	

Security	Kensington Security Lock Kit	PC766A
----------	------------------------------	--------

Accessories	HP ap5000 Wall Mount kit	BT390AA
	HP PS/2 Standard Keyboard	DT527A
	HP PS/2 2-Button Optical Scroll Mouse	EY703AA
	HP USB-P/S2 Optical Mouse	DC369A
	HP USB Optical Travel Mouse	RH304AA



Technical Specifications

System Unit	Dimensions (HxWxD)	(12.40 x 15.79 x 9.33 in) 31.5 x 40.1 x 23.7 cm Bottom footprint: (W: 9.84 x D: 9.33 in) W: 25.0 x D: 23.7 cm
	Weight	24.36 lb (11.05 kg)
	Stand-Alone Power Requirements	Electrical Ratings 90 to 264 VAC; 47 to 63 Hz Average Operating Power 47.3W under normal operation Max Operating Power 130 watts
	Temperature	Operating 50° to 104° F (10 to 40° C) Non-operating -20° to 140° F (-30° to 60° C)
	Relative Humidity	Operating 20 to 85%
	Altitude	Operating 0 to 10,000 ft (3,048 m)
	(unpressurized)	Non-operating 0 to 30,000 ft (9,144 m)
	Industry Standard Certifications	UL, CSA, FCC Compliance, ENERGY STAR®, EPEAT® Silver
		For accessibility information on HP products, please visit: http://www.hp.com/accessibility .

ROM BIOS Information

Key features of the HP BIOS in the ap5000 include:

- Security – Power on password, F-10 Setup password, USB port disable,
- Thermal and power management – The BIOS provides and enables thermal and power management technologies
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. Provides power conservation features under Windows XP.
- Ability to disable the internal speaker

Other Features	Description
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI) allows the system to wake from a low power mode.
SMBIOS Ver. 2.4	System Management BIOS, previously known as DMI BIOS, for system management information
Dual-State Power Button	Power button acts as both an on/off button and suspend-to-sleep button



Technical Specifications

Serviceability Features of System		
Dual Color Power LED on Front of Computer (Indicates Normal Operations and Fault Conditions)		
Diagnostic LED Explanation Table		Number of repeated red LED blinks: 2-processor thermal protection activated 3-processor not installed 4-power supply failure 5-memory error 6-video error 7-PCA failure (ROM detected failure prior to video) 8-invalid ROM, bootblock recover mode
<ul style="list-style-type: none"> Flash Recovery with Video 	<ul style="list-style-type: none"> DIMM Connectors for easy Upgrade 	<ul style="list-style-type: none"> Socketed Processor for easy Upgrade
<ul style="list-style-type: none"> Restore CD 	<ul style="list-style-type: none"> NIC LEDs (integrated) (Green, yellow, & Amber) 	<ul style="list-style-type: none"> DIMM Connectors for easy Upgrade

Serviceability Features of Chassis	
<ul style="list-style-type: none"> Dual Color Power LED – To indicate normal operations and fault conditions System memory can be upgraded Tool-less removal power supply 	
Feature	Description
ASF 2.0 support (Alert Standard Format)	Industry-standard specification for network alerting and remote control in operating system-absent environments
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted <ul style="list-style-type: none"> Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure



Technical Specifications

Eco-Label Certifications & declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR®
- IT ECO declaration
- EPEAT Silver where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	34 W	29 W	33.5 W
Sleep (Energy Star low power mode)	1 W	1.1 W	1 W
Off	0.8 W	0.9 W	0.8 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	116 BTU/hr	99 BTU/hr	115 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	3 BTU/hr	3 BTU/hr	3 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle (Fan, default speed)	3.6	26.9
Fixed Disk (random writes)	4.4	34

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium Metal

RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):



Technical Specifications

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 micro-grams/cm²/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>



Technical Specifications

Copyright © 2010 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Celeron, and Core are trademarks of Intel Corporation in the U.S. and/or other countries.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

